




CREMATION

PETS CREMATORY EQUIPMENT

FC - AF

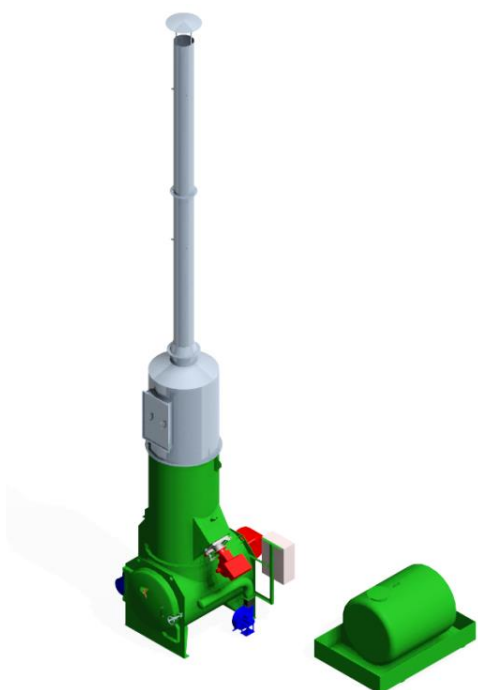

MODEL	FC - AF
CREMATOR	PETS ANIMALS CARCASSES
INCINERATION CAPACITY'	50 – 100- 200 Kg/h
COMBUSTION CHAMBER	STATIC HORIZONTAL
OPERATION	DISCONTINUOUS
OPERATION HOURS PER DAY	12 h.
HEAT VALUE	7,5 – 10 MJ/Kg
FLUE GAS CLEANING	WET SCRUBBING (available upon request)

RENDERING REFERRED TO THE PLANT WITHOUT THE FLUE GAS WET SCRUBBING SYSTEM

The proposed combustion system is designed to meet the emission limits required and enforced by the EU Standard
[# 2000/76/EU Guide line](#)

A high performances combustion system, easy to be operated, meeting stringent requirements for the environment protection and specifically designed for pet animals.

The plant is available in different capacity per hour sizes with the following features:

- Static horizontal combustion chamber complete with burner and control board. Manual unloading of ashes to take place only when plant is cold.
- Post-combustion chamber is designed to grant:
 - Temperature range 850/1.050 °C
 - Combustion gas residence time > 2 secondi
 - Swirl chamber to improve combustion's efficiency
 - Oxygen content > 6%
- Complete with burner, control board, emergency chimney
- Discontinuous operation with manual feeding system.

- Flue gas cleaning system for the abatement of pollutants – acid fumes, dioxins and heavy metals – WET SCRUBBING type, available upon request.
- Automatic control system.


TYPE	QUANTITY	½ HOUR VALUE	DAILY AVERAGE VALUE
DUSTS	mg/Nm ³	30	10
HCl	mg/Nm ³	60	10
SO ₂ + SO ₃ as SO ₂	mg/Nm ³	200	50
HF	mg/Nm ³	4	1
NO _x as NO ₂	mg/Nm ³	400	250
CO	mg/Nm ³	100	50
T.O.C.	mg/Nm ³	20	10
TYPE	QUANTITY	PROBE AVERAGE VALUE	
Hg	mg/Nm ³	0.5	
Cd + Tl	mg/Nm ³	0.05	
Pb + Cr + Cu + Sn + Mn + Sb + As + Ni + V	mg/Nm ³	0.5	
DIOXINS + DI-BENZOFURANS (2,3,7,8 TCDD)	mg/Nm ³	0,1	
		Valore medio su un periodo di campionatura di 8 h.	

The results of the measurements made to verify compliance with the emission limits are standardized at the following conditions:

- TEMPERATURE 273,15 K
- PRESSURE 101.3 kPa
- STATE OF GAS – MEASURED DRY
- CONTENT OF OXYGEN IN THE FLOWING GAS EQUAL TO 11% IN VOLUME

Sound pressure level 1 meter away from the logic perimeter of the source (i.e. the entire combustion system including its bases):

- 85 dB +/- 2 dB MAX

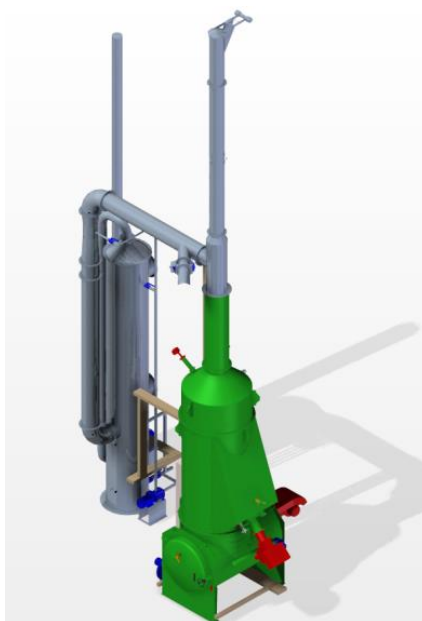

RENDERING REFERRED TO THE PLANT WITH THE FLUE GAS WET SCRUBBING SYSTEM

Note: The technical data are only indicative and need to be checked in the design phase.